



## FEATURES

### Flexicore® Closet Auger (3FL)


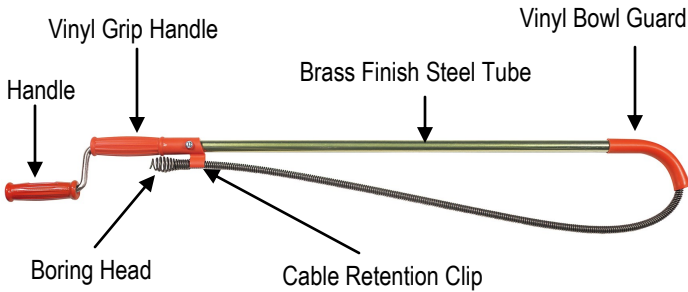


### Teletube® Closet Auger (T6FL-DH shown)

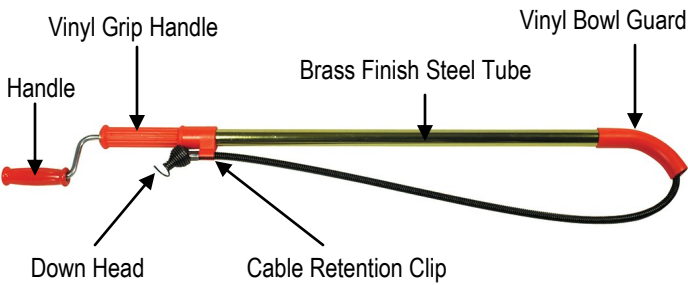


## OPERATION

1. Pull the handle out of the tube until the boring head is touching the tube. Insert tube into the toilet

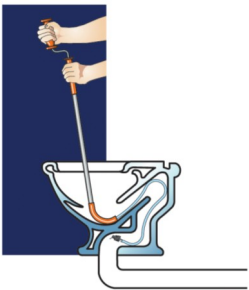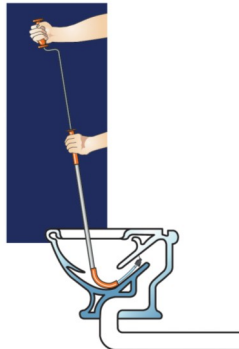


2. While turning the handle clockwise, push rod downward until the obstruction is either forced down the waste line or is caught by the boring head.

3. **IF USING TELETUBE CLOSET AUGER:** If the stoppage has not been reached, push the button located just above the grip handle, and pull back on the turning handle to release three more feet of cable, then repeat the above steps.

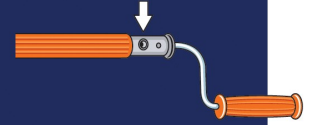

4. When the boring head catches the obstruction, pull back on the turning handle while holding down the tube.

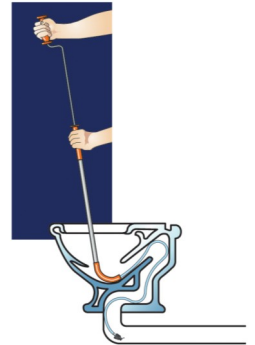

5. It is sometimes necessary to reverse rotation of the snake in order to work it through the bowl. If the head gets caught, pull back and start again.

## MAINTENANCE

### CABLE MAINTENANCE

To get maximum service from your snake, be sure that they are clean and well oiled. This not only provides running lubrication but greatly extends the life of the cables as well. Some users periodically pour oil directly into the drum. Then, as the drum turns, the cables get complete lubrication. Our SNAKE OIL is ideally suited for this purpose, since it not only lubricates the cables, it deodorizes them as well.

